


Coming soon

High-end Fusion Splicer

S185ROF/S185PMROF

Fusion Splicers for LDF and PM-LDF splicing up to 800 μ m

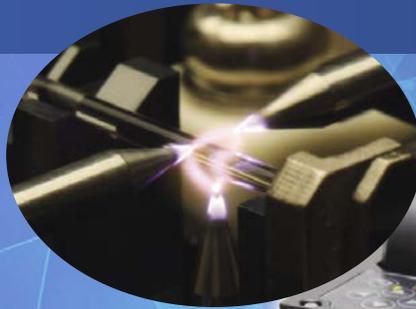

FITEL High-end Fusion Splicer S185 series featuring ROF (Ring of Fire) models, S185ROF and S185PMROF.

Though the main body is same compact as S185 series, ROF models equip the powerful arc-discharging by three electrodes instead of two electrodes.

This arc-discharging makes the plasma field (high temperature field) wider and enables splicing large diameter fibers up to 800 μ m cladding diameter.

This unique arc-discharging can heat fibers uniformly and reduce the splice loss of the fibers with dissimilar cladding diameters.

**FURUKAWA
ELECTRIC**

■ Specification

Description	S185ROF	S185PMROF
Heat source for splicing	ROF (Ring of Fire, Three electrodes Arc-discharging)	
Applicable fibers ^{*1}	SM, MM, DS, NZDS, High-Index, EDF, LDF	SM, MM, DS, NZDS, High-Index, EDF, LDF, PMF
Cladding diameter	125 to 800µm	
Coating diameter	160 to 2000µm (In Fiber holder) 160 to 900µm (Coating clamp splice)	160 to 1300µm (In Fiber holder) 160 to 900µm (Coating clamp splice)
Fiber cleave length	4mm (Coating clamp splice)	8 to 11mm (Cladding clamp splice)
Typical splice loss ^{*2}	SM(ITU-T G652): 0.014dB	
Typical extinction ratio ^{*2}	-	PANDA: -36.8dB ^{*3} (Angle offset: 0.6degree)
Return loss	>60dB	
Typical splice time ^{*4}	15s (SM by cladding clamp splice)	15s (SM by cladding clamp splice) 40s (PANDA by cladding clamp splice)
Tension strength	1.96 (+0% to +20%)	
Applicable protection sleeve length	10 to 60mm	
Typical heat time	35s (S922:40mm sleeve)	
Splice programs	Max.200	
Heater programs	Max.100	
Splice data storage	Max. 1000 including 4 images before and after splice	
Fiber image magnification on LCD	104X, 278X or 556X	
Dimension	210W x 180D x 150H mm	
Weight (without Battery)	4.55kg	4.8kg
Monitor	4.3" wide color LCD with touch panel	
Data output	USB ver. 2.0 type A: 1 port USB ver. 2.0 mini B: 1 port	
Operating temperature	0 to 40°C	
Storage temperature	-40 to 60°C	
Humidity	0 to 90% (Non-condensing)	
Power source	AC input 100 to 240V (50/60Hz)	

*1 Fibers should be applied to ITU-T standard. In case of other fibers, depending on the type of fiber, the optimization of splice program may be needed or the splice result may not be satisfied.

*2 These are references. Depending on the environment and condition, the number vary.

*3 Extinction ratio -36.8dB is measured in the condition that the initial extinction ratio is -40dB and there is the splice with 0.6 degree of rotation offset.

*4 This value is references. Depending on the type of fiber and condition of fiber on splicer, the number can vary.

■ Standard package

Item	P/N	Quantity			
		S185ROF		S185PMROF	
		-00	-01	-00	-01
S185ROF Main body	S185ROF-X-A-0001	1	1	-	-
S185PMROF Main body	S185PMROF-X-A-0001	-	-	1	1
Hard Carrying Case	HCC-12	-	1	-	1
AC Adapter	S982A	1	1	1	1
AC Cable Cord	-	1	1	1	1
Z Stage Lock	ZL-01	1pair	1pair	1pair	1pair
Spare Electrode	-	1set	1set	1set	1set
Change Tool for Vertical Electrode	-	1	1	1	1
Electrode Sharpener	D5111	1	1	1	1
Cleaning Brush	VGC-01	1	1	1	1
User Manual	-	1	1	1	1



Standard Package



Hard Carrying Case

■ Ordering number form

Mark	Category	Code	Remark
S185 A -0 B	A Splicer model	ROF	S185ROF
		PMROF	S185PMROF
B	Hard carrying case	0	None
		1	Included

■ Optional components

Item	P/N	Quantity
160µm Coating Fiber Holder	S713S-160	1pair
250µm Coating Fiber Holder	S713S-250	1pair
400µm Coating Fiber Holder	S713S-400	1pair
650µm Coating Fiber Holder	S713S-650	1pair
900µm Coating Fiber Holder	S713S-900	1pair
1300µm Coating Fiber Holder	S713S-1300	1pair
Customized Fiber Holder ^{*5}	S713S-XXX	1pair
USB Cable	USB-01	1
Wi-Fi Dongle	WFD-01	1



Fiber Holder

*5 Available Suitable size Fiber holder depending on the coating diameter of splicing fiber.

FURUKAWA ELECTRIC CO., LTD.

* Please understand that contents of this catalog may change without notice.

Export Control Regulations

The products and/or technical information presented in this publication may be subject to the application of the Foreign Exchange and Foreign Trade Act and other related laws and regulations in Japan.
In addition, the Export Administration Regulations (EAR) of the United States may be applicable. In cases where exporting or reexporting the products and/or technical information presented in this publication, customers are requested to follow the necessary procedures at their own responsibility and cost.
Please contact the Ministry of Economy, Trade and Industry of Japan or the Department of Commerce of the United States for details about procedures.

JE-239 201 TR100