


# PRONTO-500-IPL

Portable laser probe for IPL sources, 2 - 350 J per pulse



## USER INTERFACE (SSE MODE)

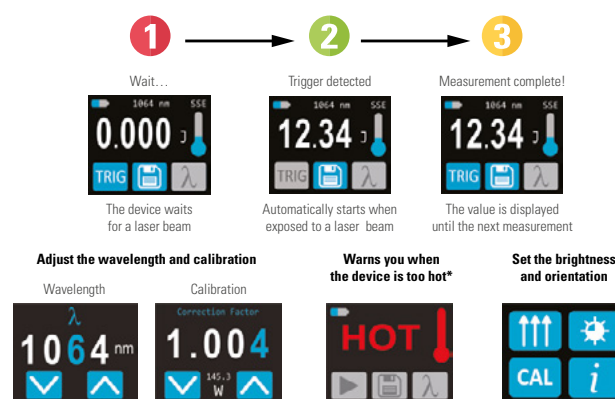

## KEY FEATURES

- **HIGH ENERGY PER PULSE**  
Accurate readings up to 350 J/pulse!
- **EASY TO USE**  
The touchscreen color LCD allows for a friendly user interface. You can make a measurement with just the touch of a button!
- **DATA LOGGING**  
Save your data to the internal memory and then transfer them to your PC over the USB connection.
- **LARGE APERTURE**  
55 mm Ø aperture to accommodate large beams
- **RUGGED**
  - All-metal body
  - High damage thresholds
- **PROTECTIVE WINDOW**
  - For measurements with gel-coupled IPL heads.
  - Protects the absorber, easy to clean
- **SERIAL COMMANDS**  
Serial commands are available to let you take full control of your PRONTO from your PC.

## ACCESSORIES



Stand with steel post



Pelican carrying case

# PRONTO-500-IPL


## Specifications

CE NIST\*  
Traceable



\*Also traceable to NRC-CNRC



PRONTO-500-IPL	
<b>MAX PULSE ENERGY (SINGLE SHOT)</b>	350 J
<b>EFFECTIVE APERTURE</b>	55 mm Ø
<b>APERTURE TYPE</b>	Full aperture with protective window
<b>MEASUREMENT CAPABILITY</b>	
Spectral range	0.19 - 2.5 µm
Calibrated spectral range	1064 nm
Energy range	2 - 350 J
Noise equivalent energy	500 mJ
Minimum repetition period	15 s (= time between measurements)
Maximum pulse width	433 ms
Accuracy	± 5%
<b>DAMAGE THRESHOLDS</b>	
Maximum average power density	45 kW/cm² (1064 nm, 10 W, CW)
Pulsed laser damage threshold	175 J/cm² (10 ms pulses)
Maximum allowable absorber temperature	65 °C
<b>GENERAL SPECIFICATIONS</b>	
Display type	Touchscreen color LCD
Display size	28.0 x 35.0 mm (128 x 160 pixels)
Data storage	50 000 pts
Battery type	Rechargeable Li-ion
Battery life	17 hours or 4 200 measurements (with brightness set at 25%)
Battery recharge via	USB port
<b>PHYSICAL CHARACTERISTICS</b>	
Effective aperture	55 mm Ø
Dimensions (sensor head)	88W x 88L x 32D mm (194L with handle)
Dimensions (monitor)	41W x 136L x 16D mm
Weight	930 g
<b>ORDERING INFORMATION</b>	
Compatible stand	STAND-S-443
Product page	

Specifications are subject to change without notice