






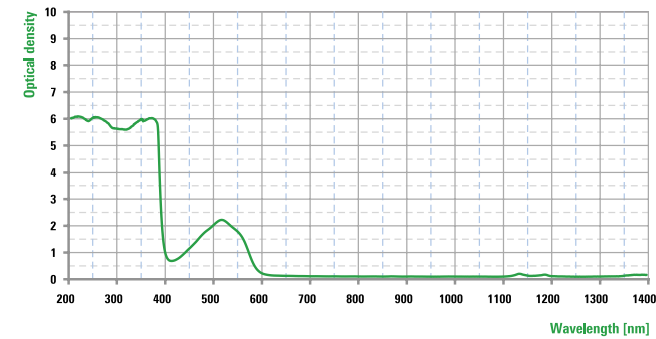

**LASER SAFETY EYEWEAR - Technical specifications**

**FILTER CODE: UL-1019**


<b>Filter</b>	Alignment protection
<b>Colour</b>	Pink
<b>Material</b>	Polycarbonate
<b>VLT</b>	19%
<b>Alignment laser wavelength T%(λ) &gt;10%</b>	-



MODEL	561	562	559G	546	5X7	616L
<b>FRAME STYLE</b>						
<b>ITEM CODE</b>	○ 561H.00.00.307 ● 561H.00.01.307	○ 562S.00.00.307 ● 562S.00.01.307	559G.00.00.307	NOT AVAILABLE	NOT AVAILABLE	NOT AVAILABLE

Wavelength		OD	561	562	559G
440	500	1	0,01 W 2E-6J 440-500 RB1	0,01 W 2E-6J 440-500 RB1	0,01 W 2E-6J 440-500 RB1
>500	535	2	0,1 W 2E-5J >500-530 RB2	0,1 W 2E-5J >500-530 RB2	0,1 W 2E-5J >500-530 RB2
>535	570	1	0,01 W 2E-6J >535-570 RB1	0,01 W 2E-6J >535-570 RB1	0,01 W 2E-6J >535-570 RB1

3ET632/UL1019 Rev. 32/23