






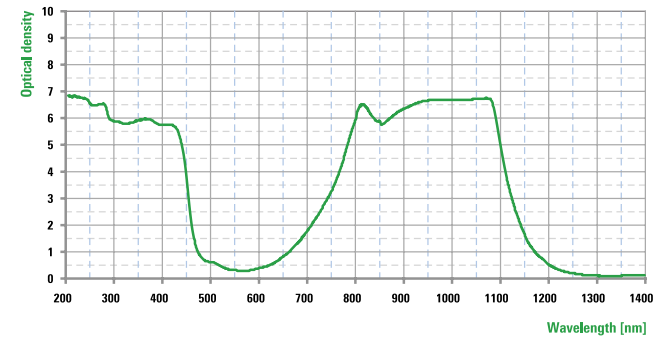

LASER SAFETY EYEWEAR - Technical specifications

FILTER CODE: UL-1005


Filter	Full and alignment protection
Colour	Green
Material	Polycarbonate
VLT	33%
Aiming beam wavelength T%(λ) >10%	470-650 nm



MODEL	561	562	559G	546	5X7	616L
FRAME STYLE						
ITEM CODE	○ 561H.00.00.309 ● 561H.00.01.309	○ 562S.00.00.309 ● 562S.00.01.309	559G.00.00.309	546L.00.10.551	5X7L.00.00.651	NOT AVAILABLE

Wavelength	OD	561	562	559G	Wavelength	OD	546	Wavelength	OD	5X7			
190	315	7	D LB7 IR LB4	D LB7 IR LB4	D LB7 IR LB4	660	690	1	0.01 W 2E-6J 660-690 RB1	660	675	1	0.01 W 2E-6J 660-675 RB1
315	430	5	DIR LB5	DIR LB5	DIR LB5	745	1115	3	DIR LB3	675	690	2	0.1 W 2E-5J 675-690 RB2
750	1100	3	DIR LB3	DIR LB3	DIR LB3	770	1100	4	DIR LB4	715	1120	3	DIR LB3
775	1100	4	DIR LB4	DIR LB4	DIR LB4	785	1085	5	DIR LB5	730	1115	4	DIR LB4
790	1090	5	DIR LB5	DIR LB5	DIR LB5	800	825	6	DIR LB6	745	1110	5	DIR LB5
920	1075	6	DIR LB6 M LB6Y	DIR LB6 M LB6Y	DIR LB6 M LB6Y	885	1075	6	DIR LB6	760	1105	6	DIR LB6 M LB6Y
1000	1070	7	D LB6 IR LB7 M LB7Y	D LB6 IR LB7 M LB7Y	D LB6 IR LB7 M LB7Y	1000	1070	7	D LB6 IR LB7 M LB7Y	780	1100	7	D LB6 IR LB7 M LB7Y
1030	1065	8	D LB6 IR LB8 M LB8Y	D LB6 IR LB8 M LB8Y	D LB6 IR LB8 M LB8Y	1030	1065	8	D LB6 IR LB8 M LB7Y	790	1090	8	D LB6 IR LB8 M LB8Y
9000	11000	6	DI LB4	DI LB4	DI LB4	9000	11000	6	DI LB4	9000	11000	6	DI LB4

3ET632/UL1005 Rev. 0224